4 CAVITIES MANIFOLD INTERAXES 230x230/*4 FACH HEIßKANALBLOCK STICHMAß 230X230*

THERMOPLAY®

Manifold / *Verteilerblock*		
CODE	d*	NOZZLE TYPE / *DÜSENTYP*
E90309-45	Ø 4.5	D22
E90309-60	Ø 6	K5/8 Ø22 - F16 - F24
E90309-65	Ø 6.5	D30
E90309-80	Ø 8	K5/8 Ø30
E90309-115	Ø 11.5	F32 - D44

Heater / Heizung			
CODE	Q.TY *MENGE*	VOLT	WATT each *WATT pro Stück*
E92043	2	240	2200

Thermocouple / Thermofühler		
CODE	DESCRIPTION *BESCHREIBUNG*	Q.TY *MENGE*
E08562	Thermocouple Fe-CuNi *Thermofühler Fe-CuNi*	2

Grounded thermocouple with J type calibration
Die Masse des Thermofuehlers ist zusammen mit dem Type J.

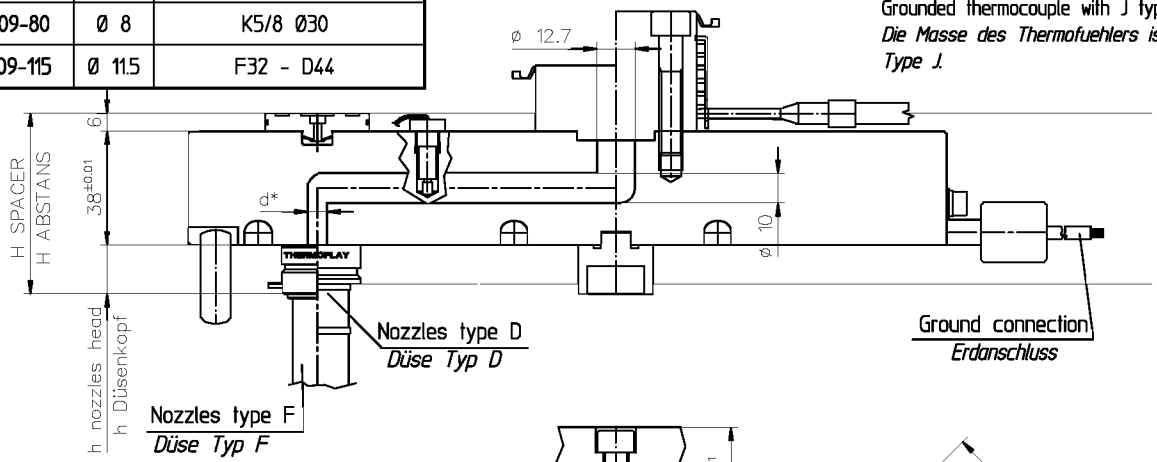

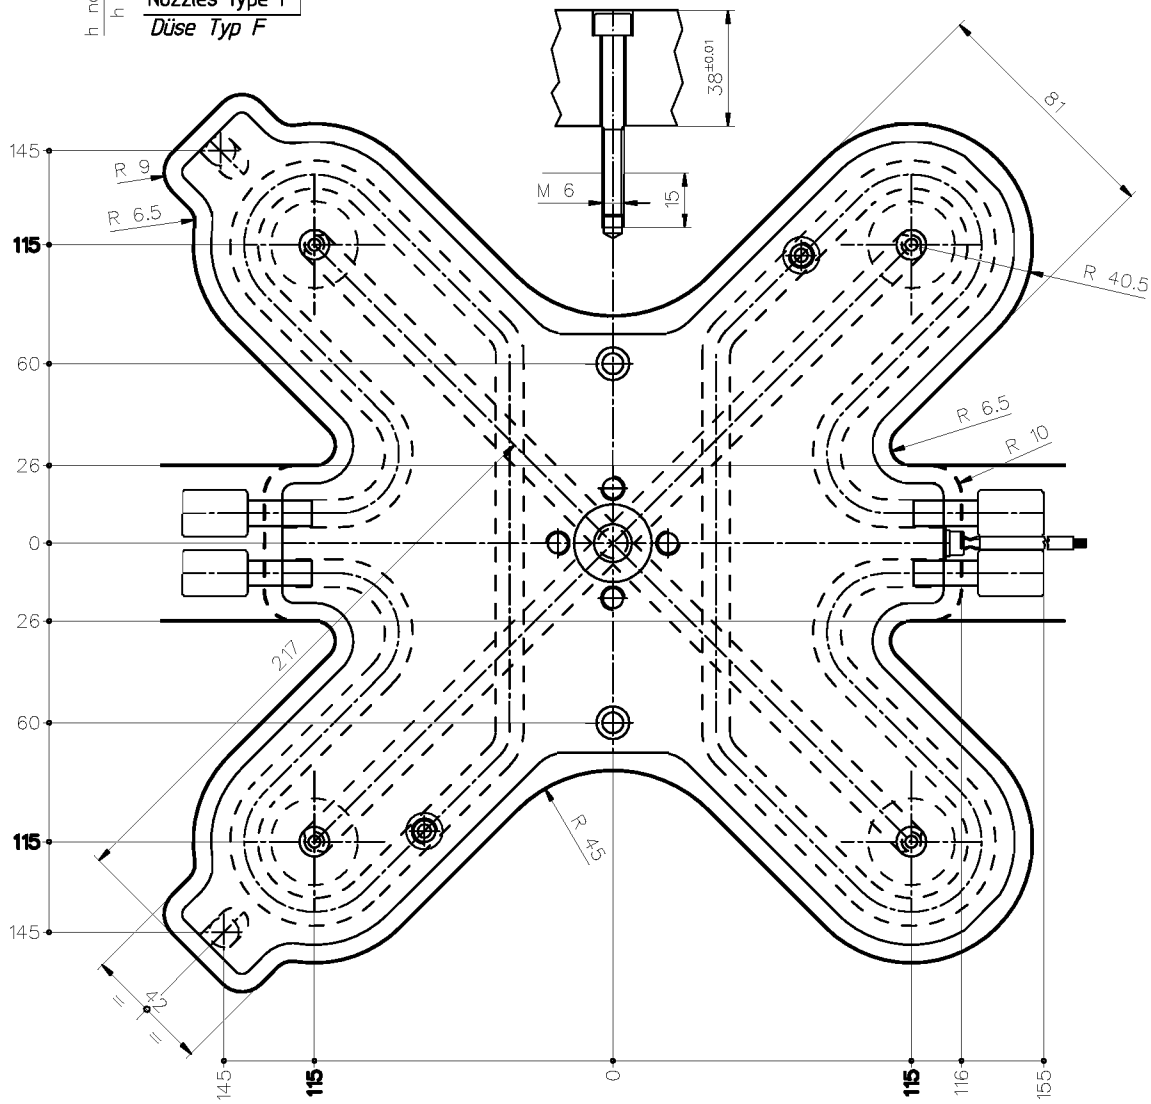

It is possible to manifacture special manifolds with the same overall dimensions and distance between injection centres from 220x220 mm up to 230x230 mm, to be used also with KS5/8 Ø 44 nozzle types in addition to the indicated types.

Ex. "Manifold interaxes 230x230 mm and KS5/8 Ø 44 nozzles type" (special due to nozzle type)
Ex. "Manifold interaxes 225x225 mm and D22 nozzles type" (special due to interaxes)
Ex. "Manifold interaxes 225x225 mm and KS5/8 Ø 44 nozzles type" (special due to interaxes and nozzle type)

Es ist möglich mit derselben Außenversperrung spezielle Verteilerblöcke mit dem Stichmaß der Einspritzung von 220x220 mm und max. 230x230 mm Ausgabe einzuschieben, zur Auswahl eignen sich die Düsentypen KS5/8 Ø 44.

Beispiel: Stichmaß 230X230 mm mit Dsentyp KS5/8 Ø 44 (speziell für Dsentyp)
Beispiel: Stichmaß 225x225 mm mit Dsentyp D22 (speziell für Stichmaß)
Beispiel: Stichmaß 225x225 mm mit Dsentyp KS5/8 Ø 44 (speziell für Stichmaß und Düsëntyp)